



DOWNLIGHT FUTURA SHOP 95

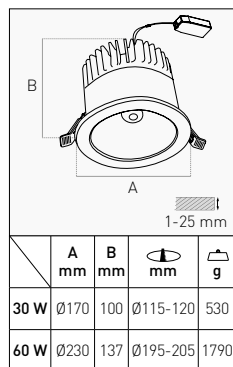

OUTPUT					
30 W	2.530 lm	36°	CRI>95	3000 K	FTS-301330
				4000 K	FTS-301340
60 W	5.260 lm	60°	CRI>95	3000 K	FTS-602330
	5.000 lm	85°	CRI>90	4000 K	FTS-602340

220-240 V IP20

DIMMABLE* GLASS DIFFUSER ALUMINUM DRIVER INCL. 3 YEARS

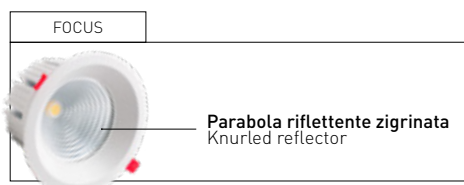

OPTIONAL

*DIMMERABILE ESCLUSIVAMENTE CON I SEGUENTI DRIVER
DIMMABLE ONLY WITH THE FOLLOWING DRIVERS

31 W - 60 W	RDFTPD-60	88,00 €
36 W - 44 W	RDFTPD-2835	45,00 €

IN 230 V OUT 9-52 V DALI PUSH

COMPLIANCE

Downlight realizzati in alluminio pressofuso ad alto potere dissipante con chip Led CRI95 per una resa perfetta dei colori. Driver incluso.

Downlights made of die-cast aluminum with high dissipating power and CRI95 Led chip for perfect color rendering. Driver included.

EMC DIRECTIVE 2014/30/EU | EN 55015:2013 /A1:2015 | EN 61547:2009 | EN 61000 3-2:2014 | EN 61000 3-3:2013
LVD DIRECTIVE 2014/35/EU | EN 60598-1:2015+A1:2018 | EN 60598 2-2:2012 | EN 62471:2008 | EN 62493:2015

ROHS DIRECTIVE 2011/65/CE | IEC6231-5:2013 | IEC62321-7-1:2015 | IEC62321-7-2:2017 | IEC623 21-4:2017 | IEC62321-6:2015 | IEC 62321-8:2017