


LAMPIONE URBANO
PLAZA



150 W

40 W


LAMPIONE URBANO PLAZA

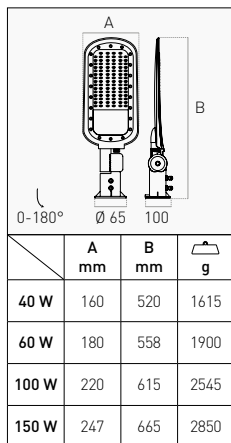

	A mm	B mm	g
40 W	160	520	1615
60 W	180	558	1900
100 W	220	615	2545
150 W	247	665	2850

OUTPUT				
40 W	5.600 lm	4000 K	PLZ-4014040	92,50 €
60 W	8.400 lm	4000 K	PLZ-6014040	112,50 €
100 W	14.000 lm	4000 K	PLZ-10014040	162,50 €
150 W	20.250 lm	4000 K	PLZ-15014040	187,50 €


 220-240 V IP66 IK08 90° x 140° Ø 60 mm 50.000 HOURS 5 YEARS CAM

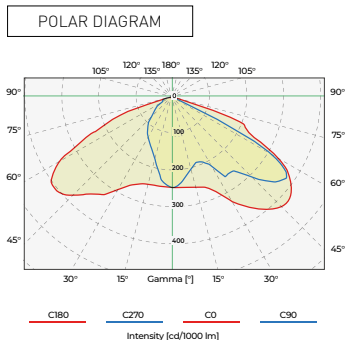

Corpo in alluminio pressofuso, garantisce solidità e durata nel tempo. La verniciatura a polveri epossidiche resistente alla corrosione protegge efficacemente la struttura dall'usura degli agenti atmosferici mentre le lenti asimmetriche in PC assicurano una diffusione uniforme e direzionata della luce. Grazie all'attacco palo regolabile 0-180° può essere installato su pali dritti o curvi.

Die-cast aluminum body, it guarantees solidity and durability over time. The corrosion-resistant epoxy powder coating effectively protects the structure against atmospheric agents, while the asymmetrical PC lenses assure a uniform and focused light diffusion. Thanks to the 0-180° adjustable pole connection, it can be installed on straight or curved poles.

INSTALLATION



REGOLAZIONE ATTACCO PALO 0°-180°
POLE ADAPTOR ADJUSTMENT 0°-180°



IDONEO PER FISSAGGIO A PALO DRITTO, CURVO O A PARETE
SUITABLE FOR CURVED, STRAIGHT POLE OR WALL FIXING

INCLUDED



SCARICATORE DI SOVRATENSIONE DA 10 KV: EVITA IL DANNEGGIAMENTO DEL PRODOTTO IN CASO DI FORTI CARICHE ELETTROSTATICHE O SOVRATENSIONI
10 KV SPD (SURGE PROTECTION DEVICE): AVOID DAMAGE TO THE PRODUCT IN THE EVENT OF STRONG ELECTROSTATIC CHARGES OR OVERVOLTAGES

COMPLIANCE

EMC DIRECTIVE 2014/30 /EU | EN IEC 55015:2019+A11 | EN 61547:2009 | EN IEC 61000-3-2:2019 | EN 61000-3-3:2013+A1
LVD DIRECTIVE 2014/35/EU | EN-60598-1:2015+A1 | EN 62493:2015 | EN-60598-2-3:2003+A1 | EN 62471:2008
ROHS DIRECTIVE 2011/65/EU ANNEX II AND ITS AMENDMENT DIRECTIVE [EU] 2015/863 | IEC 62321-3-1:2013 | IEC6231-4:2013+A1:2017
IEC6231-5:2013 | IEC62321-6:2015 | IEC62321-7-1:2015 | IEC62321-7-2:2017 | IEC62321-8:2017